
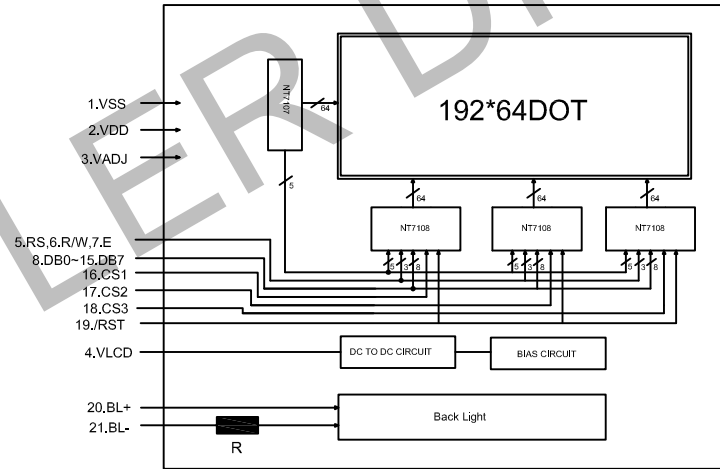


| | |
|-----|--------|
| 21 | LED- |
| 20 | LED+ |
| 19 | /RST |
| 18 | /CS3 |
| 17 | /CS2 |
| 16 | /CS1 |
| 15 | DB7 |
| 14 | DB6 |
| 13 | DB5 |
| 12 | DB4 |
| 11 | DB3 |
| 10 | DB2 |
| 9 | DB1 |
| 8 | DB0 |
| 7 | E |
| 6 | R/W |
| 5 | RS |
| 4 | VLCD |
| 3 | VADJ |
| 2 | VDD |
| 1 | VSS |
| PIN | SYMBOL |



| ITEM | SELECTABLE CONTENTS |
|---------------------|------------------------|
| DISPLAY MODE | STN YELLOW MODE |
| | STN GRAY MODE |
| | STN BLUE MODE |
| FSTN | |
| POLARIZER TYPE | REFLECTIVE |
| | TRANSFLECTIVE |
| | TRANSMISSIVE, POSITIVE |
| VIEWING DIRECTION | TRANSMISSIVE, NEGATIVE |
| | 6 O'CLOCK |
| LED BACKLIGHT | 12 O'CLOCK |
| | WHITE |
| TEMPERATURE RANGE | YELLOW-GREEN |
| | RED |
| | GREEN |
| | BLUE |
| | AMBER |
| | - |
| CHARACTER PATTERNS | STANDARD TEMPERATURE |
| | WIDE TEMPERATURE |
| OPERATING VOLTAGE | 5.0V |
| LCD DRIVING VOLTAGE | 9.7V |
| LCD DRIVE METHOD | 1/64 DUTY 1/9 BIAS |
| LCD DRIVE IC | NT7107/NT7108 |

THE PART NUMBER IN MASS PRODUCTION

- 1. STN(Y-G), TRANSFLECTIVE LCD; Y-G BACKLIGHT; 6 O'CLOCK;
- 2.--
- 3.--
- 4.--

| | | |
|-----------|-----|--------------|
| UNIT | MM | TOLERANCE |
| | | X.X = ±0.3 |
| | | X.XX = ±0.20 |
| | | ANG = - |
| 3RD ANGLE | | |
| SCALE: | 1:1 | |
| DRAWN: | | |
| CHECKED: | | |
| APPROVED: | | |

ZETTLER DISPLAYS

XIAMEN ZETTLER ELECTRONICS CO., LTD.

| | | |
|-----------|-----------------|-----------|
| TITLE: | LCM | |
| MODEL NO: | AGM1964D SERIES | REV A |
| PART NO: | | SH NO 1/1 |